


 **REGENT**  
LIGHTING

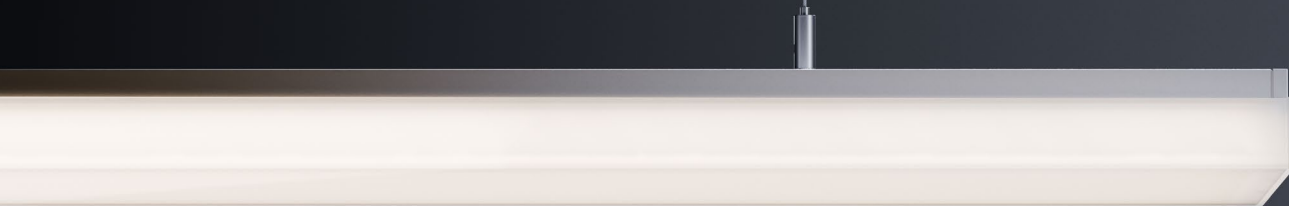

**PUREFACE**

The art of simplicity.

PEOPLE LIGHT OUR WAY

# PUREFACE

Minimal construction  
for an open feeling of space.

**PUREFACE** is a masterpiece of minimalist design. With its slim silhouette of just 35 mm in height, it literally floats in the room without forcing itself into the foreground. Its pure, elegant form embodies modern aesthetics to perfection, while its filigree appearance with an impressive glare-free luminous intensity of 5'000 lm / 1,2 m – proof that true beauty shines not only on the outside but also on the inside.

With its flat design, **PUREFACE** blends harmoniously into any architectural environment as if it had always been there.

## Ultra-flat design, 3 m uninterrupted

---

**PUREFACE** impresses with its ultra-slim height of just 35 mm with integrated control gear, setting new standards. Thanks to its compact shape, it is easy to install – an advantage for a wide range of applications.

## Robust and durable

---

The standard IP54 protection ensures increased durability and makes **PUREFACE** particularly suitable for use in demanding environments such as laboratories and medical facilities.



### **Gentle ceiling brightening**

---

The sophisticated diffuser reliably reduces glare, creates an inviting, pleasant atmosphere in any environment and ensures that the light is always at its best and provides gentle ceiling illumination.

### **Superior light intensity without glare**

---

With an impressive luminous flux of 5'000 lm at  $UGR \leq 19$ , **PUREFACE** offers the ideal tool for creative lighting designs in technical applications. This minimizes the need for additional light sources and saves project costs without compromising the quality of light.

### **Resource-saving materialization**

---

The innovative look of **PUREFACE** combines sustainability and functionality by reducing material consumption, while at the same time meeting all standards for office lighting.

Thanks to the customized photometry, the luminaire shines evenly over an impressive length of up to 3 m – without any interruption.



**read the full story:**



# PUREFACE

## Product range overview

<b>Length</b>
1,225 m, 1,525 m, 2,425 m or 3,025 m
<b>Luminous flux of luminaire</b>
5'000 lm by 1,225 m [UGR ≤19]
<b>Colour temperature</b>
3'000 K, 4'000 K
<b>Colour rendering</b>
Ra ≥90
<b>Weight</b>
2,2 kg by 1,225 m
<b>Lighting control</b>
DALI2
<b>Protection class</b>
IP54

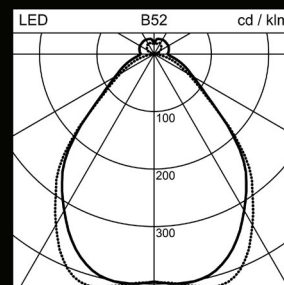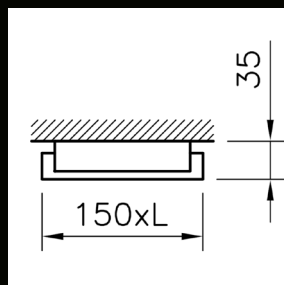

For more information, please visit [www.regent.ch/en/pureface](http://www.regent.ch/en/pureface)  
#peoplelightourway



Subject to technical modifications.  
Regent assumes no liability for printing errors.