



Echo 210

It is a well-known fact that all good things come from above. This is particularly true for Echo. Regent's new downlight is a delight even before being switched on. The installation of the lightweight is a matter of seconds and feasible completely

tool-free. The luminance of Echo is positively influenced by both mixing chamber and diffusion disc. The result: a pleasantly soft lighting experience which even sensitive eyes will find enjoyable, yet without compromising efficiency.

FEATURES

- Glare-free light thanks to highly precise light conduction
- High luminous efficiency
- Passive cooling
- Quick and tool-free mounting
- Lightweight system suitable for all ceiling types
- Streamlined design makes for perfect integration into ceiling architecture
- Lightweight system suitable for all ceiling types

TECHNICAL DATA

System power	20 W, 23 W, 26 W
Luminous flux of luminaire	2000 lm, 2100 lm, 2600 lm, 2700 lm
Colour temperature	3000 K, 4000 K
Colour Rendering Index (CRI)	$R_a \geq 83$
Maintained luminous flux	L70 (B50) 50'000 h
Protection class	I
Ingress Protection	IP20/IP44 from below when mounted in closed ceilings

SPECIFICATIONS

- Downlight with pleasantly homogeneous luminance levels
- Ceiling cut out 210 mm
- Aluminium-coated or white reflector
- Tool-free assembly of accessories
- Dimmable digital DALI
- Operating unit included in delivery

APPLICATION AREAS

Retail & Hospitality: retail spaces, presentation of merchandise/key locations, restaurants, hotels, art & culture establishments

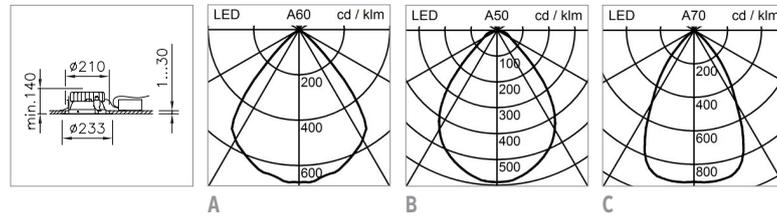

 IP20
 IP44

230V



0.5m

850°C



RECESSED DOWNLIGHT ECHO 210 LED

System power	Luminous flux of luminaire	Colour temperature	Notes	Light control	Emergency unit	Ref. n°
20 W	2100 lm	4000 K	reflector silver	DALI		A 1022.6501
20 W	2000 lm	3000 K	reflector silver	DALI		A 1022.6509
23 W	2100 lm	4000 K	reflector silver	DALI	with emergency unit	A 1022.6504
26 W	2700 lm	4000 K	reflector silver	DALI		A 1001.1935
26 W	2600 lm	3000 K	reflector silver	DALI		A 1001.1928
26 W	2700 lm	4000 K	reflector silver	DALI	with emergency unit	A 1008.8790
26 W	2700 lm	4000 K	reflector white	DALI		B 1001.2496
26 W	2600 lm	3000 K	reflector white	DALI		B 1001.2487
26 W	2700 lm	4000 K	reflector white	DALI	with emergency unit	B 1008.8947
26 W	2700 lm	4000 K	reflector silver	DALI		C 1001.1955
26 W	2600 lm	3000 K	reflector silver	DALI		C 1001.1947
26 W	2700 lm	4000 K	reflector silver	DALI	with emergency unit	C 1008.8810
26 W	2600 lm	3000 K	reflector silver	DALI	with emergency unit	C 1008.8798



COVER RING ECHO 210 LED

clear

Farbe	Notes	Ref. n°
white	IP44 from below, in case of closed ceilings	1001.2403
silber	IP44 from below, in case of closed ceilings	1001.2365
white	IP55 from below, in case of closed ceilings	1001.2405
silber	IP55 from below, in case of closed ceilings	1001.2367



COVER RING ECHO 210 LED

matt

Farbe	Notes	Ref. n°
white	IP55 from below, in case of closed ceilings	1001.2404
silber	IP55 from below, in case of closed ceilings	1001.2366



COVER RING ECHO 210 LED

Wallwasher

Farbe	Notes	Ref. n°
white	for reflector, wide beam	1001.2422
silber	for reflector, wide beam	1001.2420
white	for reflector, medium beam	1001.2431
silber	for reflector, medium beam	1001.2429



RING ECHO 210 LED

Notes	Ref. n°
	1001.2415



EMBEDDING HOUSING B.BOX

Notes	Ref. n°
in steel, sendzimized	1001.2268