



Lightup

Lightup is made of high-grade aluminium, features compact minimalist design and is highly efficient (128 lm/W), delivering maximum lumens per metre. It is designed for application in office environments and meets the requirements laid down in the standards to an optimum: a pendant luminaire that incorporates the perfect marriage of well-being and design.

With a direct component of 70% and an indirect component of 30% Lightup delivers uniform lighting for all office applications. The high luminous flux levels are achieved thanks to specially developed LED Optimising Optics.

FEATURES

Economical all-round solution
Compact design: 68 x 58 mm, incl. integral control gear
LED optics suitable for application in offices, UGR < 19; $L_{max} \geq 65^\circ \leq 3000 \text{ cd/m}^2$
Up to 6000 lm per 1.2 m
Optimum luminous efficacy of up to 128 lm/W
Direct-indirect lighting (70%/30%), indirect component wide-beam
Lengths of up to 2364 mm require only 2 suspension points
Pre-assembled to save installation time

TECHNICAL DATA

System power (Length 1186 mm)	36 W / 47 W
Luminous flux of luminaire (Length 1186 mm)	4550 lm / 6000 lm
Colour temperature	3000 K / 4000 K
Colour Rendering Index (CRI)	> 80
Colour tolerances	MacAdam3
UGR	< 19
Life time	L80 50'000 h
Protection class	I
Ingress Protection	IP20


SPECIFICATIONS


Lengths: 1186 mm, 1481 mm, 2364 mm
Frame comprises a single-piece aluminium profile, no visible screws
Anodised or painted white
Steel suspension cables are infinitely adjustable in height and can be aligned horizontally as required
Transparent, halogen-free, connected supply cable
DALI light control

APPLICATION AREAS

Office & Education: open-plan offices, individual offices, meeting rooms, entrance areas, circulation zones



IP20 650°C 230V 

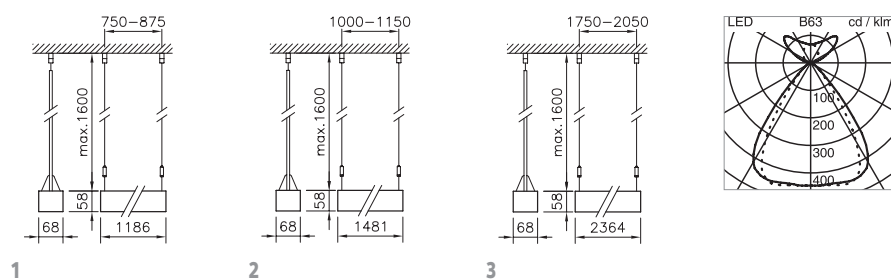

Lightup LED							
System power	Luminous flux of luminaire	Colour temperature	Length	Light control		Ref. n° white	Ref. n° uncoloured / anodised
36 W	4550 lm	4000 K	1186 mm	dimmbable digital DALI	1	1021.8830	1022.2770
36 W	4350 lm	3000 K	1186 mm	dimmbable digital DALI	1	1021.8829	1022.2769
47 W	6000 lm	4000 K	1186 mm	dimmbable digital DALI	1	1021.8832	1022.2772
47 W	5700 lm	3000 K	1186 mm	dimmbable digital DALI	1	1021.8831	1022.2771
45 W	5800 lm	4000 K	1481 mm	dimmbable digital DALI	2	1021.8834	1022.2774
45 W	5500 lm	3000 K	1481 mm	dimmbable digital DALI	2	1021.8833	1022.2773
60 W	7700 lm	4000 K	1481 mm	dimmbable digital DALI	2	1021.8836	1022.2776
60 W	7300 lm	3000 K	1481 mm	dimmbable digital DALI	2	1021.8835	1022.2775
71 W	9100 lm	4000 K	2364 mm	dimmbable digital DALI	3	1021.8838	1022.2778
71 W	8700 lm	3000 K	2364 mm	dimmbable digital DALI	3	1021.8837	1022.2777
94 W	12000 lm	4000 K	2364 mm	dimmbable digital DALI	3	1021.8840	1022.2780
94 W	11400 lm	3000 K	2364 mm	dimmbable digital DALI	3	1021.8839	1022.2779