

SOLO SLIM OFFICE

SOLO SLIM integrates itself harmoniously into any architecture thanks to its round design. Whether as a ceiling, pendant or freestanding luminaire – SOLO SLIM spreads pleasant light everywhere. The elegant and uniform design makes the luminaire an aesthetic highlight for any room.

FEATURES

Height of frame only 53 mm, white or silver
Aluminium housing
Extremely even spread of light across the opal diffuser or microprismatic optics, suitable for application in offices
Recessed ceiling luminaire with or without trim or especially recessed in concrete
Ceiling mounted luminaire optional halo effect through indirect component [8 %]
Pendant luminaire direct-indirect light emission [61 %/39 %]
Available with MyLights Tunable – enabling the colour temperature to be adjusted to align with daylight conditions
LED board and optics replaceable

TECHNICAL DATA

Luminaire efficiency	up to 171 lm/W
Luminous flux of luminaire	1150 – 17'200 lm
Colour temperature	3000 K, 4000 K, 2700 – 6500 K
Colour Rendering Index [CRI]	Ra ≥ 80
Maintained luminous flux	L80 50'000 h
Protection class	I
Ingress Protection	IP40
Colour consistency	SDCM 3
Photobiological safety	Risk group 0, no risk

SPECIFICATIONS

Up to 4 diameters depending on the mounting type: ca. 400 mm, 500 mm, 650 mm, 950 mm
Optics, suitable for application in offices according to EN 12464-1 with Glare control: up to UGR < 16 and maximum luminance up to $L_{max} \leq 3000 \text{ cd/m}^2$
Integrated electronic control gear
Light control: DALI or MyLights Remote Casambi
Suitable for emergency lighting [DC-compatible]
Available with emergency unit
Pendant tube 1 m long as standard; can be shortened on site
Other types of pendant possible thanks to accessories (3 m can be shortened on site, surface mounted and pendant luminaire)
IP44 kit optional
Also available recessed ceiling, ceiling, pendant and freestanding luminaire

FIELDS OF APPLICATION


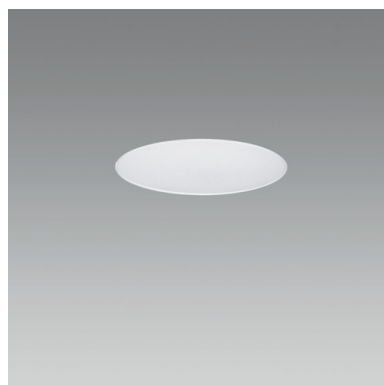




Office & Education: classrooms, meeting rooms, offices, cafeterias, foyers and lobbies, corridors, staircases
Retail & Hospitality: hotels, reception areas, circulation zones



230V IP40 IK07


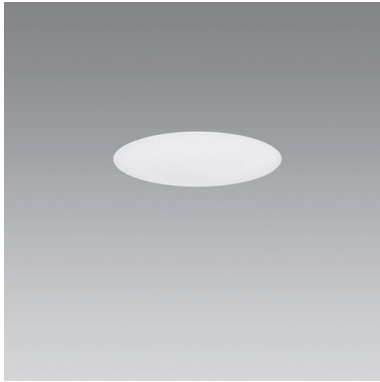






A+


1

2

3

4







RECESSED CEILING LUMINAIRE SOLO SLIM OFFICE WITHOUT CEILING TRIM

Diameter	System power	Luminous flux of luminaire	Colour temperature	Light control	Notes	Ref. n°
414 mm	8 W	1150 lm	4000 K	dimnable digital DALI		1 1022.5525
414 mm	8 W	1060 lm	3000 K	dimnable digital DALI		1 1022.5524
414 mm	15 W	2150 lm	4000 K	dimnable digital DALI		1 1022.5527
414 mm	15 W	1980 lm	3000 K	dimnable digital DALI		1 1022.5526
514 mm	14 W	2200 lm	4000 K	dimnable digital DALI		2 1022.5529
514 mm	14 W	2050 lm	3000 K	dimnable digital DALI		2 1022.5528
514 mm	25 W	3700 lm	4000 K	dimnable digital DALI		2 1022.5532
514 mm	25 W	3450 lm	3000 K	dimnable digital DALI		2 1022.5531
514 mm	33 W	4350 lm	2700 – 6500 K	MyLights Remote Casambi Casambi	MyLights Tunable	2 1022.5530
664 mm	26 W	4050 lm	4000 K	dimnable digital DALI		3 1022.5534
664 mm	26 W	3750 lm	3000 K	dimnable digital DALI		3 1022.5533
664 mm	39 W	5800 lm	4000 K	dimnable digital DALI		3 1022.5536
664 mm	39 W	5300 lm	3000 K	dimnable digital DALI		3 1022.5535
964 mm	56 W	8900 lm	4000 K	dimnable digital DALI		4 1022.5538
964 mm	56 W	8200 lm	3000 K	dimnable digital DALI		4 1022.5537
964 mm	75 W	11'900 lm	4000 K	dimnable digital DALI		4 1022.5540
964 mm	75 W	11'000 lm	3000 K	dimnable digital DALI		4 1022.5539


1

2

3

4


RECESSED CEILING LUMINAIRE SOLO SLIM OFFICE WITH CEILING TRIM

Diameter	System power	Luminous flux of luminaire	Colour temperature	Light control	Notes	Ref. n°
428 mm	8 W	1150 lm	4000 K	dimmable digital DALI		1 1022.5542
428 mm	8 W	1060 lm	3000 K	dimmable digital DALI		1 1022.5541
428 mm	15 W	2150 lm	4000 K	dimmable digital DALI		1 1022.5544
428 mm	15 W	1980 lm	3000 K	dimmable digital DALI		1 1022.5543
528 mm	14 W	2200 lm	4000 K	dimmable digital DALI		2 1022.5546
528 mm	14 W	2050 lm	3000 K	dimmable digital DALI		2 1022.5545
528 mm	25 W	3700 lm	4000 K	dimmable digital DALI		2 1022.5549
528 mm	25 W	3450 lm	3000 K	dimmable digital DALI		2 1022.5548
528 mm	33 W	4350 lm	2700 – 6500 K	MyLights Remote Casambi Casambi	MyLights Tunable	2 1022.5547
680 mm	26 W	4050 lm	4000 K	dimmable digital DALI		3 1022.5551
680 mm	26 W	3750 lm	3000 K	dimmable digital DALI		3 1022.5550
680 mm	39 W	5800 lm	4000 K	dimmable digital DALI		3 1022.5553
680 mm	39 W	5300 lm	3000 K	dimmable digital DALI		3 1022.5552
980 mm	56 W	8900 lm	4000 K	dimmable digital DALI		4 1022.5555
980 mm	56 W	8200 lm	3000 K	dimmable digital DALI		4 1022.5554
980 mm	75 W	11'900 lm	4000 K	dimmable digital DALI		4 1022.5557
980 mm	75 W	11'000 lm	3000 K	dimmable digital DALI		4 1022.5556


1

2

3

4


RECESSED CEILING LUMINAIRE SOLO SLIM OFFICE FOR CONCRETE RECESSED MOUNTING

Diameter	System power	Luminous flux of luminaire	Colour temperature	Light control	Notes	Ref. n°
414 mm	8 W	1150 lm	4000 K	dimnable digital DALI		1 1022.5559
414 mm	8 W	1060 lm	3000 K	dimnable digital DALI		1 1022.5558
414 mm	15 W	2150 lm	4000 K	dimnable digital DALI		1 1022.5561
414 mm	15 W	1980 lm	3000 K	dimnable digital DALI		1 1022.5560
514 mm	14 W	2200 lm	4000 K	dimnable digital DALI		2 1022.5563
514 mm	14 W	2050 lm	3000 K	dimnable digital DALI		2 1022.5562
514 mm	25 W	3700 lm	4000 K	dimnable digital DALI		2 1022.5566
514 mm	25 W	3450 lm	3000 K	dimnable digital DALI		2 1022.5565
514 mm	33 W	4350 lm	2700 – 6500 K	MyLights Remote Casambi Casambi	MyLights Tunable	2 1022.5564
664 mm	26 W	4050 lm	4000 K	dimnable digital DALI		3 1022.5568
664 mm	26 W	3750 lm	3000 K	dimnable digital DALI		3 1022.5567
664 mm	39 W	5800 lm	4000 K	dimnable digital DALI		3 1022.5571
664 mm	39 W	5300 lm	3000 K	dimnable digital DALI		3 1022.5570
964 mm	56 W	8900 lm	4000 K	dimnable digital DALI		4 1022.5573
964 mm	56 W	8200 lm	3000 K	dimnable digital DALI		4 1022.5572
964 mm	75 W	11'900 lm	4000 K	dimnable digital DALI		4 1022.5575
964 mm	75 W	11'000 lm	3000 K	dimnable digital DALI		4 1022.5574



CEILING MOUNTING PLATE SOLO

for version with ceiling trim Ø 528 mm, for version without ceiling trim Ø 514 mm

Notes	Ref. n°
white, module 600	1000.1830
white, module 625	1000.1831



JOINT RING SOLO

with IP44

Notes	Ref. n°
white, Ø 400 mm	1000.2886
white, Ø 500 mm	1000.2887
white, Ø 650 mm	1000.2888
white, Ø 950 mm	2005.7870



COMPENSATING RING SOLO

for compensation of additionally applied top layers up to a maximum of 13 mm

Notes	Ref. n°
white, 0-13 mm, optional, for Ø 514 mm	1000.1894



DRILLING GAGE SOLO SLIM

Notes	Ref. n°
white, per montaggio degli apparecchi without ceiling trim	1022.6824




RETROFITS SOLO

Retrofit kit for older SOLO luminaires (fluorescent lamps and LED)

Mandatory installation accessories must be ordered separately, observe the instructions in the mounting instructions

Diameter	System power	Colour temperature	Light control	Ref. n°
400 mm	8 W	4000 K	DALI	1021.3779
400 mm	8 W	3000 K	DALI	1021.3777
400 mm	15 W	4000 K	DALI	1021.3784
400 mm	15 W	3000 K	DALI	1021.3782
500 mm	14 W	4000 K	DALI	1021.3788
500 mm	14 W	3000 K	DALI	1021.3786
500 mm	25 W	4000 K	DALI	1021.3792
500 mm	25 W	3000 K	DALI	1021.3790
500 mm	37 W	4000 K	DALI	1021.3797
500 mm	37 W	3000 K	DALI	1021.3795
650 mm	26 W	4000 K	DALI	1021.3801
650 mm	26 W	3000 K	DALI	1021.3799
650 mm	39 W	4000 K	DALI	1021.3805
650 mm	39 W	3000 K	DALI	1021.3803
650 mm	60 W	4000 K	DALI	1021.3810
650 mm	60 W	3000 K	DALI	1021.3808
950 mm	56 W	4000 K	DALI	1021.3814
950 mm	56 W	3000 K	DALI	1021.3812
950 mm	75 W	4000 K	DALI	1021.3818
950 mm	75 W	3000 K	DALI	1021.3816
950 mm	118 W	4000 K	DALI	1021.3823
950 mm	118 W	3000 K	DALI	1021.3821



MOUNTING ACCESSORIES FOR THE RETROFITS KIT

RECESSED LUMINAIRE

Select the correct accessories according to the assembly instructions of the accessories

Notes	Ref. n°
Necessary mounting accessories with Ø 400mm and Ø 500mm	1000.2883
Optional drilling gage for 1000.2883	2005.3824
Necessary mounting accessories with Ø 650mm and Ø 950mm	1023.0224
Necessary mounting accessories for embedded luminaires Ø 400 mm and Ø 500 mm	1000.1813