



SUA

SUA aesthetically highlights any object while remaining discreetly in the background. The small track spotlight offering a wide choice of beam angles provides powerful light for various fields of application. At the same time, it boasts a simple and unpretentious design. The slim luminaire body made of high-quality material with a diameter of only 80 mm for all wattages and the invisible control gear, which is integrated into the track adapter, enable a uniform appearance for all possible combinations. SUA unites powerful illumination with unobtrusive aesthetics.

FEATURES

No external control gear housing
Control gear incorporated into track adapter
Also available with extremely narrow beam angle of 14°
High luminous flux of luminaire of up to approx. 3000 lm
Simple cylindrical design
Discreet and compact, Ø 80 mm
Consistent visual appearance thanks to same housing dimensions for all versions
Excellent colour rendering: CRI ≥ 90
Also available with especially warm colour temperature 2700 K
High luminous efficacy of up to 103 lm/W

TECHNICAL DATA

System power	12 W, 16 W, 18 W, 25 W, 27 W, 31 W
Luminous flux of luminaire	1100 lm, 1150 lm, 1500 lm, 1450 lm, 2050 lm, 2150 lm, 2250 lm, 2900 lm, 3050 lm, 3200 lm, 3300 lm
Colour temperature	2700 K, 3000 K, 4000 K
Colour Rendering Index [CRI]	Ra ≥ 90
Maintained luminous flux	L80 [B50] 50'000h
Protection class	I
Ingress Protection	IP20

SPECIFICATIONS







Light control: DALI or MyLights Remote Casambi
Designed for Global Trac Pro [ON/OFF] 3-circuit track and Global Trac Pulse [DALI]
Colours: white, silver, black
Beam angles: 14°, 17°, 23°, 33°, 60°
Operating unit integrated
Passive cooling
High-quality die-cast aluminium housing
Pure aluminium reflector
Flexibly adjustable: rotatable 350°, tiltable 90°

APPLICATION AREAS

Retail & Hospitality: retail spaces, exhibition spaces, restaurants, foyers and lobbies, corridors, galleries, museums
Office & Education: reception desks, libraries, offices

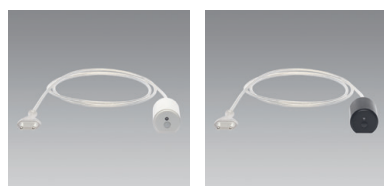


650°C 230V IP20 0.5m


A

B

C

D

E
TRACK SPOTLIGHT SUA LED

System power	Luminous flux of luminaire	Beam angle	Colour temperature	Light control	Ref. n° white	Ref. n° silver	Ref. n° black
Performance level 1: 1100 - 1500 lm							
16 W	1500 lm	14°	4000 K	ON/OFF	A 2002.8797	2002.8857	2002.8918
12 W	1150 lm	14°	4000 K	DALI	A 2001.3599	2001.3659	2001.3719
16 W	1450 lm	14°	3000 K	ON/OFF	A 2002.8796	2002.8856	2002.8917
12 W	1100 lm	14°	3000 K	DALI	A 2001.3598	2001.3658	2001.3718
16 W	1450 lm	14°	2700 K	ON/OFF	A 2002.8795	2002.8855	2002.8916
12 W	1100 lm	14°	2700 K	DALI	A 2001.3597	2001.3657	2001.3717
16 W	1500 lm	17°	4000 K	ON/OFF	B 2002.8788	2002.8848	2002.8909
12 W	1150 lm	17°	4000 K	DALI	B 2001.3590	2001.3650	2001.3710
16 W	1450 lm	17°	3000 K	ON/OFF	B 2002.8787	2002.8847	2002.8908
12 W	1100 lm	17°	3000 K	DALI	B 2001.3589	2001.3649	2001.3709
16 W	1450 lm	17°	2700 K	ON/OFF	B 2002.8786	2002.8846	2002.8907
12 W	1100 lm	17°	2700 K	DALI	B 2001.3588	2001.3648	2001.3708
16 W	1500 lm	33°	4000 K	ON/OFF	D 2002.8779	2002.8839	2002.8900
12 W	1150 lm	33°	4000 K	DALI	D 2001.3581	2001.3641	2001.3701
16 W	1450 lm	33°	3000 K	ON/OFF	D 2002.8778	2002.8838	2002.8899
12 W	1100 lm	33°	3000 K	DALI	D 2001.3580	2001.3640	2001.3700
16 W	1450 lm	33°	2700 K	ON/OFF	D 2002.8777	2002.8837	2002.8898
12 W	1100 lm	33°	2700 K	DALI	D 2001.3579	2001.3639	2001.3699
Performance level 2: 2050 - 2250 lm							
25 W	2250 lm	14°	4000 K	ON/OFF	A 2002.8800	2002.8860	2002.8921
25 W	2250 lm	14°	4000 K	DALI	A 2001.3602	2001.3662	2001.3722
25 W	2150 lm	14°	3000 K	ON/OFF	A 2002.8799	2002.8859	2002.8920
25 W	2150 lm	14°	3000 K	DALI	A 2001.3601	2001.3661	2001.3721
25 W	2150 lm	14°	2700 K	ON/OFF	A 2002.8798	2002.8858	2002.8919
25 W	2150 lm	14°	2700 K	DALI	A 2001.3600	2001.3660	2001.3720
18 W	2150 lm	23°	4000 K	ON/OFF	C 2002.8791	2002.8851	2002.8912
18 W	2150 lm	23°	4000 K	DALI	C 2001.3593	2001.3653	2001.3713
18 W	2050 lm	23°	3000 K	ON/OFF	C 2002.8790	2002.8850	2002.8911
18 W	2050 lm	23°	3000 K	DALI	C 2001.3592	2001.3652	2001.3712
18 W	2050 lm	23°	2700 K	ON/OFF	C 2002.8789	2002.8849	2002.8910
18 W	2050 lm	23°	2700 K	DALI	C 2001.3591	2001.3651	2001.3711
18 W	2150 lm	33°	4000 K	ON/OFF	D 2002.8782	2002.8842	2002.8903
18 W	2150 lm	33°	4000 K	DALI	D 2001.3584	2001.3644	2001.3704
18 W	2050 lm	33°	3000 K	ON/OFF	D 2002.8781	2002.8841	2002.8902
18 W	2050 lm	33°	3000 K	DALI	D 2001.3583	2001.3643	2001.3703
18 W	2050 lm	33°	2700 K	ON/OFF	D 2002.8780	2002.8840	2002.8901
18 W	2050 lm	33°	2700 K	DALI	D 2001.3582	2001.3642	2001.3702

System power	Luminous flux of luminaire	Beam angle	Colour temperature	Light control	Ref. n° white	Ref. n° silver	Ref. n° black
18 W	2150 lm	60°	4000 K	ON/OFF	E 2002.8773	2002.8833	2002.8893
18 W	2150 lm	60°	4000 K	DALI	E 2001.3575	2001.3635	2001.3695
18 W	2050 lm	60°	3000 K	ON/OFF	E 2002.8772	2002.8832	2002.8892
18 W	2050 lm	60°	3000 K	DALI	E 2001.3574	2001.3634	2001.3694
18 W	2050 lm	60°	2700 K	ON/OFF	E 2002.8771	2002.8831	2002.8891
18 W	2050 lm	60°	2700 K	DALI	E 2001.3573	2001.3633	2001.3693
Performance level 3: 2900 - 3300 lm							
31 W	3300 lm	23°	4000 K	ON/OFF	C 2002.8794	2002.8854	2002.8915
27 W	3050 lm	23°	4000 K	DALI	C 2001.3596	2001.3656	2001.3716
31 W	3200 lm	23°	3000 K	ON/OFF	C 2002.8793	2002.8853	2002.8914
27 W	2900 lm	23°	3000 K	DALI	C 2001.3595	2001.3655	2001.3715
31 W	3200 lm	23°	2700 K	ON/OFF	C 2002.8792	2002.8852	2002.8913
27 W	2900 lm	23°	2700 K	DALI	C 2001.3594	2001.3654	2001.3714
31 W	3300 lm	33°	4000 K	ON/OFF	D 2002.8785	2002.8845	2002.8906
27 W	3050 lm	33°	4000 K	DALI	D 2001.3587	2001.3647	2001.3707
31 W	3200 lm	33°	3000 K	ON/OFF	D 2002.8784	2002.8844	2002.8905
27 W	2900 lm	33°	3000 K	DALI	D 2001.3586	2001.3646	2001.3706
31 W	3200 lm	33°	2700 K	ON/OFF	D 2002.8783	2002.8843	2002.8904
27 W	2900 lm	33°	2700 K	DALI	D 2001.3585	2001.3645	2001.3705
31 W	3300 lm	60°	4000 K	ON/OFF	E 2002.8776	2002.8836	2002.8897
27 W	3050 lm	60°	4000 K	DALI	E 2001.3578	2001.3638	2001.3698
31 W	3200 lm	60°	3000 K	ON/OFF	E 2002.8775	2002.8835	2002.8895
27 W	2900 lm	60°	3000 K	DALI	E 2001.3577	2001.3637	2001.3697
31 W	3200 lm	60°	2700 K	ON/OFF	E 2002.8774	2002.8834	2002.8894
27 W	2900 lm	60°	2700 K	DALI	E 2001.3576	2001.3636	2001.3696
31 W	3300 lm	33°	4000 K	MyLights Remote Casambi	D 2006.0380		
31 W	3200 lm	33°	3000 K	MyLights Remote Casambi	D 2006.0379		



PLUG & PLAY FLEX SENSOR

compatible with MyLights Remote Casambi
 Ø = 40 mm, L = 60 mm

Notes	Ref. n°
white	2004.9947
black	2004.9946



MYLIGHTS SWITCH

compatible with MyLights Remote Casambi

Notes	Ref. n°
white	1022.0941
black	1022.0942